
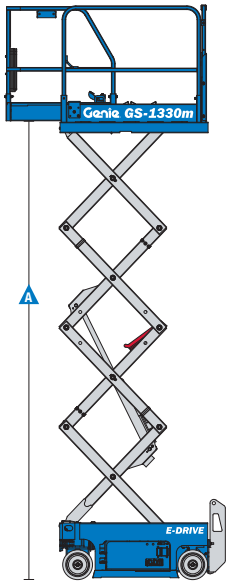



# Self-Propelled Scissor Lifts

## GS™ -1330m

### Specifications



Models	GS™-1330m	
Measurements	Metric	US
Working height maximum*	5.9 m	18 ft 10 in
▲ Platform height maximum	3.9 m	12 ft 10 in
▲ Platform height - stowed	0.90 m	2 ft 11 in
▲ Platform length - outside	1.26 m	4 ft 2 in
extended	1.72 m	5 ft 8 in
Slide-out platform extension deck	0.46 m	1.5 ft
▲ Platform width - outside	0.67 m	26.5 in
Guardrail height	1.10 m	3 ft 7 in
Toeboard height	0.15 m	6 in
▲ Height - stowed: fixed rails	2.02 m	6 ft 7.5 in
folding rails	2.02 m	6 ft 7.5 in
rails lowered	1.68 m	5 ft 6 in
▲ Length - stowed	1.41 m	4 ft 8 in
- stowed extended	1.87 m	6 ft 2 in
▲ Width	0.78 m	30.5 in
▲ Wheelbase	0.98 m	3 ft 3 in
▲ Ground clearance - centre	6 cm	2.4 in
- with pothole guards deployed	2 cm	0.63 in

### Productivity

Max platform occupancy (indoor/outdoor)**	2/-	2/-
Lift capacity	227 kg	500 lb
Lift capacity - extension deck	91 kg	200 lb
Drive height	Full height	
Drive speed - stowed	4.0 km/h	2.5 mph
Drive speed - raised	0.8 km/h	0.5 mph
Gradeability - stowed***	25%/14°	25%/14°
Turning radius - inside	40 cm	15.7 in
Turning radius - outside	1.55 m	5 ft 1 in
Raise/lower speed	20 / 24 sec	
Controls	Proportional	
Drive	dual rear wheel, electric	
Brakes	dual rear wheel, electric	
Tyres solid non-marking	25.4 x 7.62 cm	10 x 3 in

### Power

Power source	24 V DC (two 12 V 85 Ah batteries)	
Hydraulic system capacity	1.5 gal	5.6 L

### Weight\*\*\*\*

	885 kg	1,950 lb
--	--------	----------

### Standards Compliance

EU Directives: 2006/42/EC - Machinery (harmonized standard EN280);  
2004/108/EC (EMC); 2006/95/EC (LVD)

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

\*\* Indoor use only for the GS-1330m

\*\*\* Gradeability applies to driving on slopes, see Operator's Manual for details regarding slope ratings.

\*\*\*\* Weight will vary depending on options and/or country standards.

### Features

Standard Features	Easily Configured To Meet Your Needs	Options & Accessories
-------------------	--------------------------------------	-----------------------

#### Measurements

##### GS-1330m

- 5.9 m (18 ft 10 in) working height
- Up to 227 kg (500 lb) lift capacity

#### Productivity

- Folding rails with half-height swing gate
- Dual rear wheel DC electric drive
- Smart Link™ control system (joystick, 2 lift speeds & 2 selectable proportional drive speeds, user-friendly diagnostics)
- Rear recessed charger receptacle
- Platform control with battery charge indicator
- On-board diagnostic system
- AC power to platform
- Lanyard attachment points
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Dual rear wheel electric brakes
- Electric brake release
- Swing-out component trays
- Pothole guards
- Tilt level sensor with audible alarm
- Descent alarm
- Motion alarm
- Dual flashing LED beacons
- Electronic horn
- Hour meter

#### Power

- 24 V DC battery pack
- Universal 20 amp smart charger

#### Platform

- 1.26 m x 0.67 m (50 x 26.5 in) steel platform
- 0.46 m (1.5 ft) extension deck

#### Power

- 24 V DC (two 12V 85 Ah batteries)

#### Tyres

- Solid non-marking

#### Options & Accessories

##### Productivity Options

- Fixed rails with saloon doors
- Air line to platform<sup>(1)</sup>
- Power to platform: plug, socket, with optional Residual-current Circuit Breaker with Overcurrent protection
- Biodegradable hydraulic oil
- Automotive horn

##### Power Options

- Power inverter<sup>(1)</sup> (800W, 120V/60Hz, 240V/50Hz or 110V/50Hz)
- AGM maintenance-free batteries



<sup>(1)</sup> Factory-fit option only

#### AUCKLAND HEAD OFFICE

6-10 Parkway Drive,  
Mairangi Bay, Auckland  
Phone: (+64) 09 443 2436  
Fax: (+64) 09 443 2435  
Email: sales@yrco.co.nz

#### SOUTH ISLAND OFFICE

20 Nga Mahi Road,  
Sockburn, Christchurch  
Phone: (+64) 03 341 6923  
Fax: (+64) 03 341 6955  
Email: saleschch@yrco.co.nz



PROUD TO BE 100%  
NEW ZEALAND  
OWNED & OPERATED

**YR**®  
YOUNGMAN  
RICHARDSON  
& CO. LTD.